


## DS-7204AHLI-VS Standalone DVR



### Key Features

- Each channel supports up to 4CIF recording and CIF real-time recording
- Dual stream
- VGA output
- 1 SATA interface
- On-screen display (OSD)
- Up to 4-ch synchronous playback

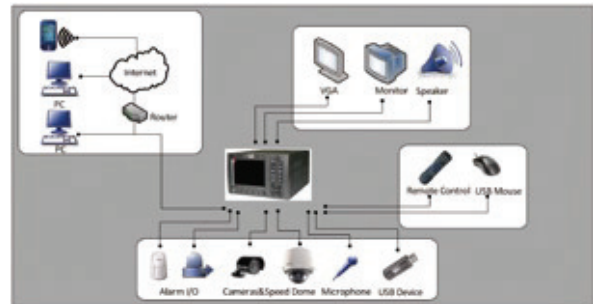

### Specifications

|                    |                         | DS-7204AHLI-VS   |
|--------------------|-------------------------|--|
| Video/Audio input  | Video compression       | H.264  |
|                    | Video input             | 4-ch   |
|                    | Video input interface   | BNC(1.0Vp-p, 75Ω)  |
|                    | Audio compression       | OggVorbis, 16Kbps  |
|                    | Audio input             | 1-ch   |
|                    | Audio input interface   | RCA (2.0Vp-p, 1KΩ)   |
| Video/Audio output | Voice talk input        | 1-ch, (Using Audio IN)   |
|                    | Preview resolution      | 4CIF (PAL: 704x576, NTSC: 704x480)   |
|                    | VGA output              | 1 VGA interface can support resolution: 1024x768/60Hz                            |
|                    | Recording resolution    | 4CIF/DCIF/2CIF/CIF/QCIF  |
|                    | Video output            | 1 Channel BNC (1.0Vp-p, 75Ω)   |
|                    | Video spot output       | 1 Channel BNC (1.0Vp-p, 75Ω)   |
|                    | Frame rate              | 4CIF: 6fps, DCIF: 12fps, 2CIF: 12fps, CIF: 25(P)/30(N) fps                       |
|                    | Stream type             | Video/Video&Audio  |
|                    | Support dual stream     | Yes  |
|                    | Video bit rate          | 32Kbps~2Mbps, or user-defined (Max. 8Mbps)                                       |
| Hard disk driver   | Audio output            | 1 channel, RCA (2.0Vp-p, 600Ω)   |
|                    | Interface type          | 1 SATA interface   |
|                    | Capacity                | Up to 2TB capacity   |
| External interface | Communication interface | 1 RJ45 10M/100M adaptive Ethernet interface, 1 RS-485 interface (T+, T-, R+, R-) |
|                    | USB interface           | 1 USB interface, can support USB disk, USB HDD, USB DVD-R/W and CD-R/W           |
|                    | Alarm input             | 4-ch   |
|                    | Alarm output            | 1-ch   |
|                    | Support Buzzer          | Yes  |
| General            | Power supply            | 12VDC  |
|                    | Consumption             | ≤25W (without HDD)   |
|                    | Working temperature     | -10°C~+55°C(14°F~131°F)  |
|                    | Working humidity        | 10%~90%  |
|                    | Dimension               | 270(D)x200(W)x130mm(H)(10.63"(D)x7.87"(W)x5.12"(H))                              |
|                    | Weight(without HDD)     | ≤5000g (11.02lbs)  |